



EasyGate Superb

Type


Swinging technology
1 wing / 2 wings
Square front

Safety & Security Detection

- 24 pairs of IR sensors
- Safety & Security levels
- Tailgating / Cross over detection

Dimensions

Cabinet height	990 mm	38.98"
Cabinet length	1 580 mm	55.12"
Cabinet width	99 mm	5.95"
Barrier height standard	990 mm	38.98"
Barrier height max.	1 800 mm	70.87"
Passage width standard*	650 mm	25.59"
Passage width max.*	1 100 mm	43.31"
<i>for height of glass wing up to 1 400 mm</i>		
	max 920 mm	36.22"
<i>for height of glass wing 1 400 - 1 800 mm</i>		

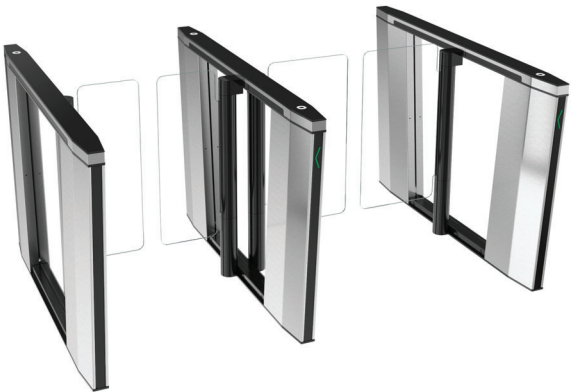

EasyGate Superb / 990 mm

* For 2 wings type



Standard Materials and Colours

Cabinet	Brushed Stainless Steel
Top Lid	Black Glass
Barriers	Tempered Glass Panels (10 mm/0.39")
Side Infill Panel	Tempered Glass Panels (6 mm/0.24")

Options

Cabinet	Any RAL Colours Alternative Surface Finishes
Top Lid	Any RAL Colours
Barriers	990 mm - 1.800 mm

Operating Environment

Indoor

Drive Mechanism


Fail-Safe

Emergency Mode

Open automatically in the exit direction

Optional Accessories

RFID reader bracket (flush mounted)
 Passage Light
 Access Light
 Lane Light
 WAV player
 USB convertor / Ethernet convertor
 RF remote control
 EasyTouch / TouchPanel / T-MON SW
 SuperCap (emergency power back-up)
 Integration of Card collector
 Ramp - Installation without drilling

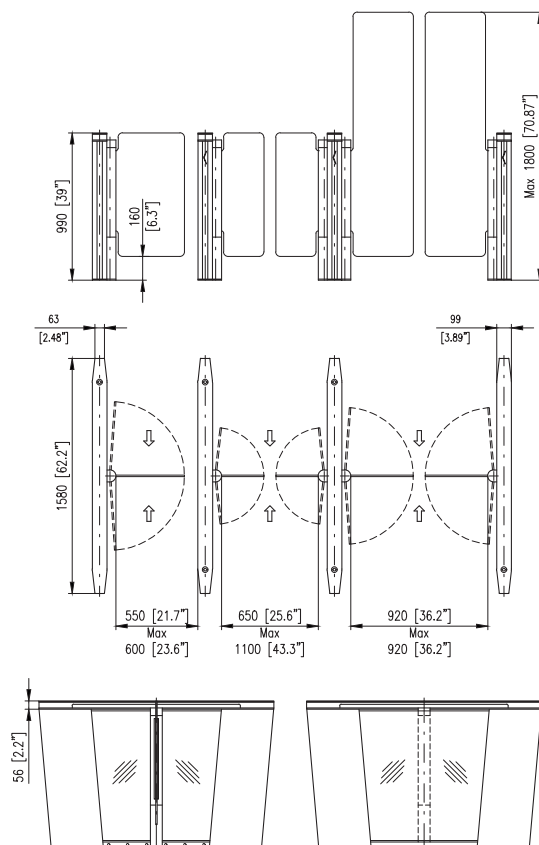

Specifications are subject to change without prior notice.